




SCP PART#: 12/2OFC-HD-WT

UPC: 810070017897

INDOOR/OUTDOOR PRO GRADE SPEAKER CABLE - 2C/12 AWG 65 STRAND OFC, EN50575:2014 Eca, SUN RES HD PVC JKT- WHITE - 500 FT/152M REEL IN BOX

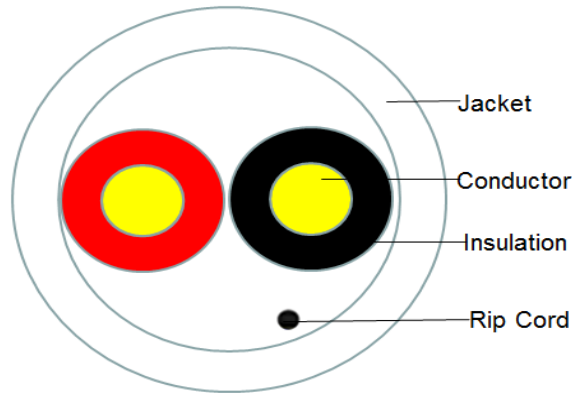

Regulatory

UL : UL 444 & UL 13, Type (UL) CMR/CL3 c(UL)
EU RoHS 2011/65/EU Compliant
EN50575: 2014 REACTION TO FIRE CLASS Dca

Application: Speaker Cable

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	12AWG X 2C(3.28mm ²)
	Construction	65/0.254mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.33mm
	AVG.Thickness	0.36mm
	Diameter	3.20mm +/-0.1mm
	Colors	Black & Red
Jacket	Material	PVC
	Min.Thickness	0.80mm
	AVG.Thickness	0.95mm
	Diameter	8.3mm +/-0.20mm
	Rip Cord	Nylon
	Color	Per request
Bend radius	Min 15D/125mm	



Structured Cable Products™

Quality Installations Deserve Quality Products

www.scpca5e.com
 sales@scpcat5e.com
 Direct: 954-327-5770
 Toll Free: 866-470-5742

SCP PART#: 12/2OFC-HD-WT

UPC: 810070017897

INDOOR/OUTDOOR PRO GRADE SPEAKER CABLE - 2C/12 AWG 65 STRAND OFC, EN50575:2014 Eca, SUN RES HD PVC JKT- WHITE - 500 FT/152M REEL IN BOX

- page 2 -

Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance	Max 5.8 ohm/km at 20°C
Insulation Resistance	Min 50MΩ*km at 20°C
Dielectric Strength	Min AC1.5KV
Rated Voltage	300V
Test Voltage	800V/min
Impedance(near by)	77 ± 5 Ω
Capacitance(near by)	20 ± 3pf/ft

Marking:

STRUCTURED CABLE PRODUCTS --- 12/2OFC-HD --- E198137 SCP3 (UL) CL3 C(UL) CMR 2C 12AWG 65 STRAND OFC -- INDOOR/OUTDOOR-SUN RES -- EN50575:2014 CE Dca UV-PVC JKT FT4 75C RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M

Packaging:

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
17kgs/37.478lbs	270X100X300	Spool	27
	310X340X350	500ft/Reel in box	