




**SCP PART#: 14/2OFC-HD-XX**

**DESCRIPTION:**

INDOOR/OUTDOOR PRO GRADE SPEAKER CABLE- 2C/14 AWG 105 STRAND OXYGEN FREE COPPER, UL CMR, SUN RES HD PVC JKT - 500 FT/152M BOX

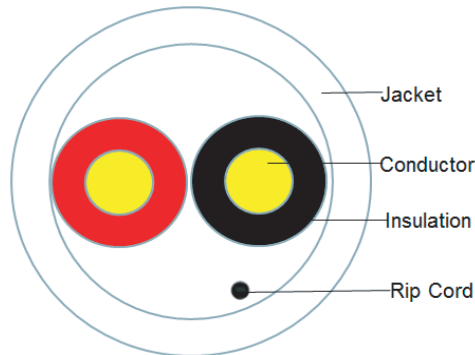

**Regulatory**

UL : UL 444 & UL 13, Type (UL) CMR/CL3 c(UL)  
EU RoHS 2011/65/EU Compliant

**Construction Characteristics:**

|             |               |                                  |
|-------------|---------------|----------------------------------|
| Conductor   | Material      | Stranded Bare Copper             |
|             | Size          | 14AWG X 2C(2.11mm <sup>2</sup> ) |
|             | Construction  | 105/0.16mm +/-0.004mm            |
| Insulation  | Material      | PVC                              |
|             | Min.Thickness | 0.33mm                           |
|             | AVG.Thickness | 0.36mm                           |
|             | Diameter      | 2.70mm +/-0.10mm                 |
|             | Colors        | Black & Red                      |
| Jacket      | Material      | PVC                              |
|             | Min.Thickness | 0.80mm                           |
|             | AVG.Thickness | 0.95mm                           |
|             | Diameter      | 7.20mm +/-0.20mm                 |
|             | Rip Cord      | Nylon                            |
|             | Color         | Per request                      |
| Bend radius | Min 15D/110mm |                                  |

**Electrical & Physical Characteristics:**

|                                  |                       |
|----------------------------------|-----------------------|
| Operating Temperature Range      | - 20°C + 75°C         |
| Minimum installation temperature | 0°C + 40°C            |
| Conductor Resistance             | Max 9.2ohm/km at 20°C |
| Insulation Resistance            | Min 50MΩ*km at 20°C   |
| Dielectric Strength              | Min AC1.5KV           |
| Rated Voltage                    | 300V                  |
| Test Voltage                     | 800V/min              |
| Impedance(near by)               | 62 ± 6 Ω              |
| Capacitance(near by)             | 28.9 ± 3pf/ft         |



# Structured Cable Products®

Quality Installations Deserve Quality Products

www.spcat5e.com  
sales@scpat5e.com  
Direct: 954-327-5770  
Toll Free: 866-470-5742

**SCP PART#: 14/2OFC-HD-XX**

**DESCRIPTION:**

INDOOR/OUTDOOR PRO GRADE SPEAKER CABLE- 2C/14 AWG 105 STRAND OXYGEN FREE COPPER, UL CMR, SUN RES HD PVC JKT - 500 FT/152M BOX

|   |                      |           |                     |
|---|----------------------|-----------|---------------------|
| Marking:  |                      |           |                     |
| STRUCTURED CABLE PRODUCTS --- 14/2OFC-HD --- E198137 SCP3 (UL) CL3 C(UL) CMR<br>2C 14AWG 105 STRAND OFC -- INDOOR/OUTDOOR-SUN RES -- EN50575:2014 CE Dca UV-<br>PVC JKT FT4 75C RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M |                      |           |                     |
| Packaging:  |                      |           |                     |
| Approx.Weight   | Approx.Dimension(mm) | Package   | Packages per pallet |
| 12kgs/26.455lbs   | 350X260X350          | 500ft/Box | 36                  |