


**SCP PART#: 16/4OFC-XX**

**Description:**

4C/16 AWG 65 STRAND OXYGEN FREE COPPER  
 SPEAKER CABLE, PVC JKT- 500 FT BOX- BK

**Regulatory**

UL : UL 444 & UL 13,  
 Type (UL) CMR/CL2R/CL3R c(UL)  
 EU RoHS 2011/65/EU Compliant  
 EN50575:2014 Reaction to fire Class Eca

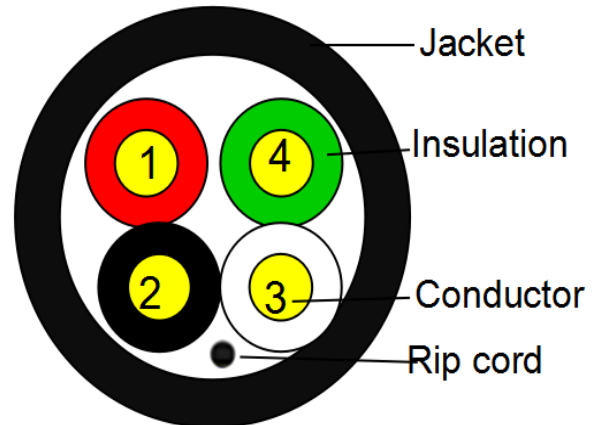

**Application:**

Speaker Level Audio, Home theater grade  
 Class 2 and 3 low voltage power

**Construction Characteristics:**

Conductor	Material	Stranded Bare Copper
	Size	16AWG X 4C(2.11mm <sup>2</sup> )
	Construction	65/0.16mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.30mm
	AVG.Thickness	0.33mm
	Diameter	2.0mm +/-0.10mm
	Colors	Black & Red & Green & White
Jacket	Material	PVC
	Min.Thickness	0.54mm
	AVG.Thickness	0.60mm
	Diameter	6.1mm +/-0.20mm
	Rip Cord	Nylon
	Color	Per request
Bend Radius		Min 15D/95mm

**Electrical & Physical Characteristics:**

Operating Temperature Range		- 20°C + 75°C	
Conductor Resistance		Max 15.5 ohm/km at 20°C	
Insulation Resistance		Min 50M Ω*km at 20°C	
Dielectric Strength		Min AC1.5KV	
Rated Voltage		Max 300 Volts	
Insulation	Unaged	Tensile Strenght	13.8Mpa
		Elongation	100%
	Aged	Tensile Strenght	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)
Jacket	Unaged	Tensile Strenght	13.8Mpa
		Elongation	100%
	Aged	Tensile Strenght	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)

**Marking:**

STRUCTURED CABLE PRODUCTS --- 16/4OFC - E198137 SCP3 (UL) CL3 C(UL) CMR 4C 16AWG 65 STRAND OXYGEN FREE COPPER - EN50575:2014 CE Eca PVC JKT FT4 75C RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 \*\*\*M

**Packaging:**

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
11.8Kgs/26.014lbs	320X260X320	500ft/152m - Box	36