

**CATEGORY 5E CABLE, 4 PAIR, UTP, UL CMR**

**Description:**


CAT5E 350 MHz 24 AWG SOLID BC 4PR, UTP,  
ANSI/TIA 568.2-D, ISO/IEC 11801 CLASS D,  
UL CMR, PVC JKT - 1000FT/305M BOX

**Regulatory:**

UL 444, ANSI/TIA 568.2-D and  
ISO/IEC 11801 Class D  
Type (UL) CMR or c(UL) FT4  
EU RoHS 2011/65 EU Compliant  
IEE 802.3bt Type 1,2,3

**Application:**

Networking Lan Cable

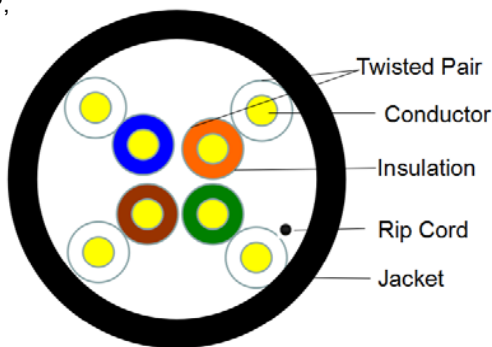

Part Number:	Jacket Color:
CAT5E-BK	Black
CAT5E-BLUE	Blue
CAT5E-GN	Green
CAT5E-GRAY	Gray
CAT5E-OR	Orange
CAT5E-PK	Pink
CAT5E-PUR	Purple
CAT5E-RD	Red
CAT5E-WT	White
CAT5E-YL	Yellow

**Construction Characteristics:**

**Electrical & Physical Characteristics:**

Conductor	Material	Solid Bare Copper	Operating Temperature Range		- 20°C + 75°C	
	Size	24AWG X 4P	Conductor Resistance		Max 93.8 ohm/km at 20°C	
	Construction	1/0.49+/-0.004mm	Dielectric Strength		Min AC1.5KV	
Insulation	Material	HDPE	Insulation	Unaged	Tensile Strength	16.5Mpa
	Min.Thickness	0.188mm			Elongation	500%
	AVG.Thickness	0.205mm		Aged	Tensile Strength	14.2Mpa(100°C 168h)
	Diameter	0.9+/-0.01mm			Elongation	250%(100°C 168h)
	Colors	Blue- White/Blue Orange-White/Orange Green-White/Green Brown-White/Brown	Jacket	Unaged	Tensile Strength	13.8Mpa
				Elongation	100%	
		Aged		Tensile Strength	11.7Mpa(100°C 168h)	
				Elongation	50%(100°C 168h)	
Jacket	Material	PVC	Rated Voltage		Max 300Volts	
	Min.Thickness	0.54mm	DC Resisitance Unbalance		Max 5%	
	AVG.Thickness	0.60mm	Pair-to-Ground Capacitance Unbalance		Max 3300pF/km	
	Diameter	5.10+/-0.10mm	Characteristic Impedance		100+/-15OHM	
	Rip Cord	Nylon	Nominal Velocity of Propagation(%)		67~69	
	Color	Varies	Propagation Delay		Max 536ns/100m	
Bend Radius		Min 20D/105mm	Delay Skew		Max 45ns/100m	

**Marking:**

STRUCTURED CABLE PRODUCTS ---CAT5E--- CAT5E ENHANCED 350 MHz UTP ANSI/TIA 568.2-D ISO/IEC 11801 CLASS D  
E198134 SCP3 (UL) C(UL) CMR 4PR 24AWG SOL BC - PVC JKT FT4 75C EU RoHS EC  
ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 \*\*\*FEET

**Packaging:**

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
9.7kgs/21.385lbs	350X260X350	1000ft/305m Box	36

### Performance-1

ITEM Frequency v	Attenuation Max (dB/100m)		NEXT Min (dB)		PS NEXT Min (dB)		ACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	2	2	65.3	80	62.3	79	63.3	78
4	4.1	3.7	56.3	67.1	53.3	65.7	52.2	63.4
8	5.8	5.2	51.8	65.5	48.8	62.5	46	60.3
10	6.5	5.9	50.3	62.1	47.3	59.7	43.8	56.2
16	8.2	7.4	47.2	57.9	44.2	56.3	39	50.5
20	9.3	8.2	45.8	57.6	42.8	54.7	36.5	49.4
25	10.4	9.2	44.3	54.3	41.3	51.7	33.9	45.1
31.25	11.7	10.3	42.9	54.7	39.9	52	31.2	44.4
62.5	17	14.6	38.4	49.4	35.4	46.7	21.4	34.8
100	22	18.6	35.3	42.5	32.3	41.7	23.3	23.9
155	28.1	22.9	32.4	48.8	29.4	45.7	4.3	25.9
200	32.4	25.7	30.8	42.3	27.8	38.9	---	---
300	41	31.6	28.1	39.7	25.1	35.8	---	---
350	44.9	34.3	27.1	44	24.1	34.2	---	---

### Performance-2

ITEM Frequency v	RL Min (dB)		ELFEXT Min (dB)		PS ELFEXT Min (dB)		PSACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	20	24.1	63.8	76.2	60.8	73.2	60.3	77
4	23	25.2	51.8	61.2	48.8	59.5	49.2	62
8	24.5	25.7	45.7	52.2	42.7	51.5	43	57.3
10	25	27.1	43.8	50.8	40.8	50.5	40.8	53.8
16	25	26.2	39.7	47.7	36.7	45.5	36	48.9
20	25	26.1	37.8	47.9	34.8	46.4	33.5	46.5
25	24.3	26.4	35.8	48.7	32.8	45.9	30.9	42.5
31.25	23.6	24.6	33.9	43.9	30.9	41.1	28.2	41.7
62.5	21.5	24	27.8	34.4	24.8	34	18.4	32.1
100	20.1	22.8	23.8	29	20.8	27.9	10.3	23.1
155	18.8	26.5	20	33.6	17	26.3	1.3	22.8
200	18	28.1	1.7	27.8	14.7	23.2	---	---
300	16.8	26.3	14.2	35.7	11.2	23.9	---	---
350	16.3	28.5	12.9	31.6	9.9	21.3	---	---